

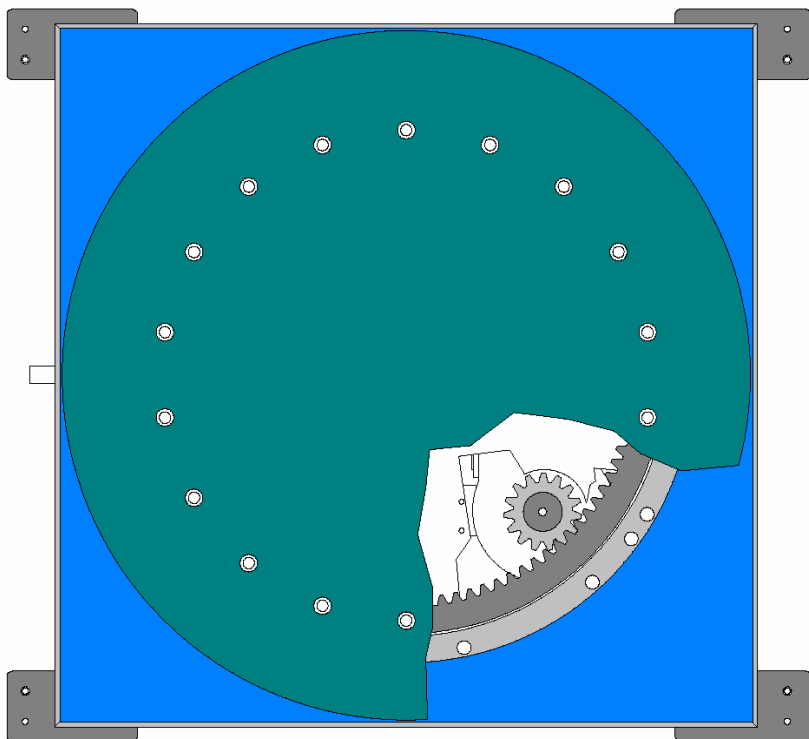


Specification Data
Horizontal Turntable
Capacity: 5 Tonnes

A&N Horizontal Turntable Model RTT5T is fully tempered after welding before precision machining of 4 x parallel slots or concentric ring markings and pilot center hole. The base frame is constructed from heavy duty structural steel designed for rigidity and provides protection to the gearing system. The gearing system is located internally and offers unsurpassed safety to the operator. An AC Motor controlled by the latest inverter control box provides infinitely variable speed control. The table is bolted to a heavy-duty thrust bearing, which can be lubricated externally via a lubricant duct, thus providing ease of maintenance. Control is via a low voltage push button controller offering the following functions; control, forward/reverse, stop/start, variable speed potentiometer

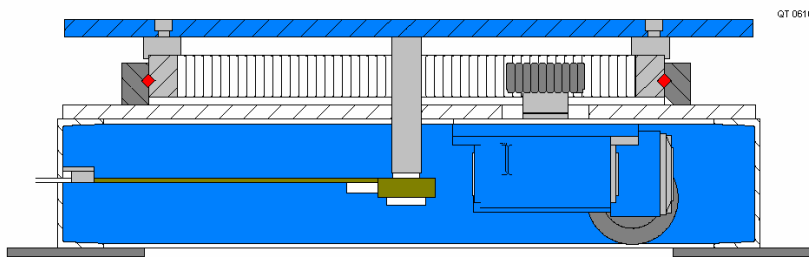

LOADING CHART


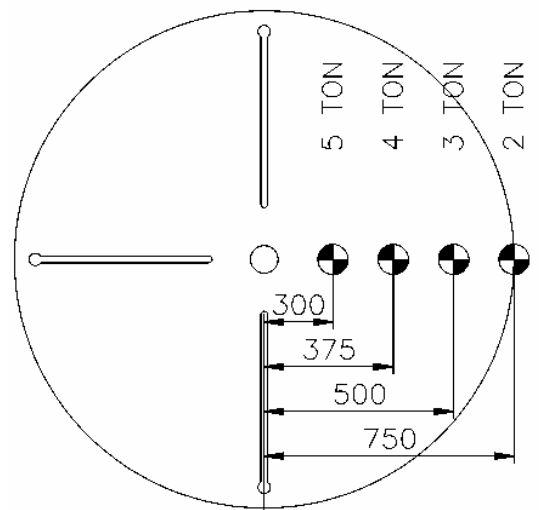


Specification

- 5 metric ton at 300mm at eccentricity
- Rotation speed at 0.1~1.0 rpm
- Single pinion drive
- 2.2Kw drive control system inverter type
- Input supply: 400V/3Ph/50Hz (available on international voltage).
- Rotary ground clamp 100amps
- Pendant control, push button type with 15 metre control leads


Ordering Information and system checklist

Equipment	Part Number	Description	
Turntable	RTT5T-	5 metric ton turntable	
Built-in with	EA-	3-phase AC motor, Pendant control with 15m cable.	Standard
Table	D900-	A round table with diameter of 900mm	Standard
	D1200-	A round table with diameter of 1200mm	Optional
	D1500-	A round table with diameter of 1500mm	Optional
	S900-	A square table with length of 900mm	Optional
	S1200-	A square table with length of 1200mm	Optional
	S1500-	A square table with length of 1500mm	Optional
Optional item	/E	Encoder	Optional
	/T	Tachometer	Optional

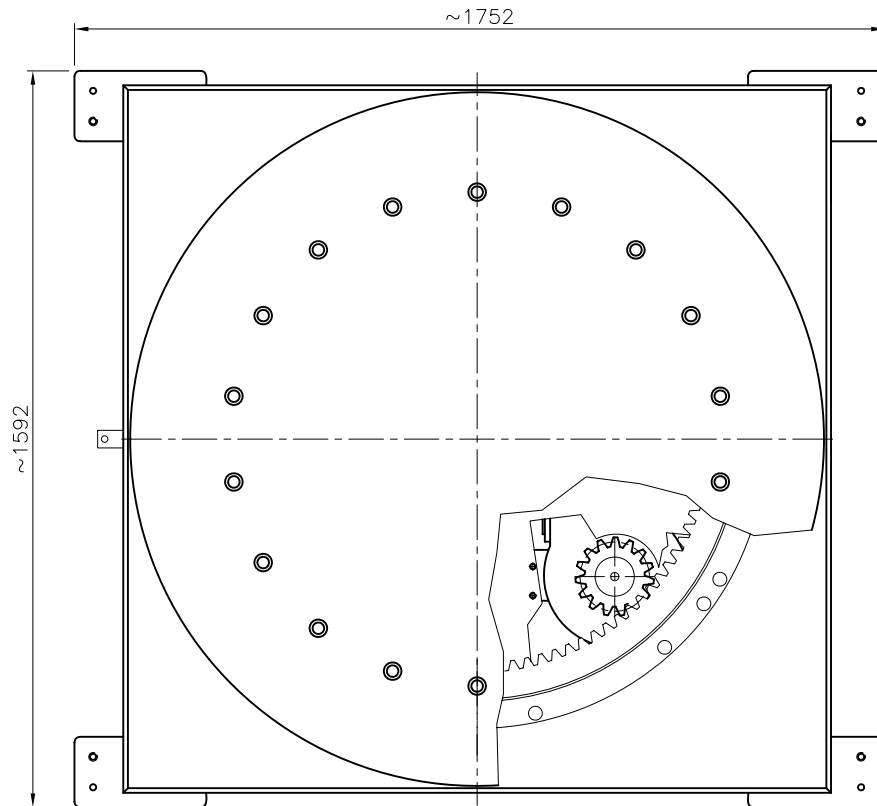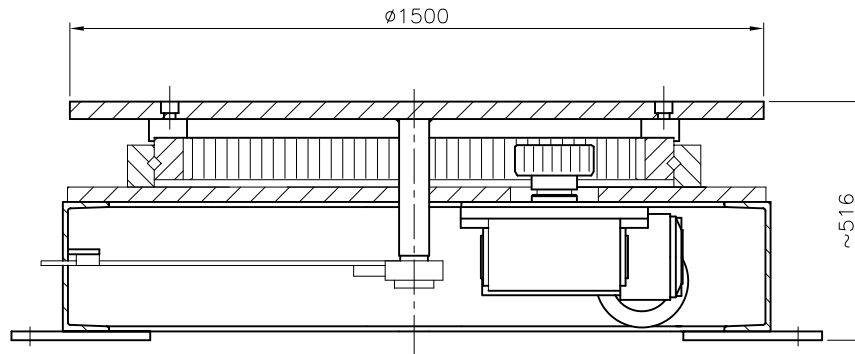

Specification for Turntable

1	Model	RTT5T-EA-D1500
2	Capacity	5Ton at 300mm Eccentricity
3	Rotation Speed	0.08~0.8rpm at 5-50Hz
4	Drive	Single Pinion
5	Drive Control	Inverter
6	Power Supply	415V-3P-50Hz
7	Control Voltage	24Vac
8	Control Means	via Push Button Pendant on 6m Cable
9	Earthing	1000 Amp (Optional)
10	Surface Preparation	Gritblast to SA2.5
11	Painting	2 coats Zinc Phosphate, 1 coat Polyurethane
12	Color	RAL 3003 Red
13	Qty	T.B.A.

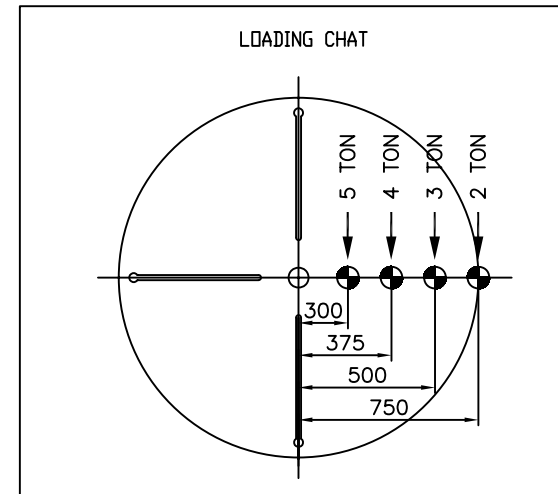

ALL DIMENSIONS IN MM, UNLESS OTHERWISE SPECIFIED.

			PROJECT/MODEL :		RTT5T-EA-D1500
			CLIENT :		
DRAWN	NAME	DATE	DWG. NAME :		SCALE: N.T.S REVISION: 0 SHEET NO: 1 OF 1
APPROVED	Kris	27-10-06	GENERAL ARRANGEMENT		
			DWG. NO. :		
THE ORIGINAL AND ALL COPIES OF THIS DRAWING TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF R.P.E. PTE. LTD. SINGAPORE					